

# Timpte Super Hopper RTAC Doubles



## Standard Features

- Aluminum ladder, platform, & 36" grab bar on front (two on rear)
- .063" Aluminum panels are used in all high stress areas for added strength & durability
  - 4' Exterior Side Panels: A Timpte trademark that offers unmatched strength & ease of repair. Smooth aerodynamic exterior sidewalls means less wind drag & lower fuel costs
  - Timpte's double wall construction allows for a smooth interior wall improving flow of grain.
- 20" king pin setting allows for better load distribution and more swing clearance
- Lights & Electrical: All weather-pack automotive style connections, sealed to prevent corrosion.
- Upper coupler assembly is a beam truss designed for the rigors of field use. Cross-members and an "X" brace are added for extra strength.
- Timpte's standard landing gear is a Holland Atlas 55 "No Lube" with a low profile cushion foot sand shoe
- Timpte traps are made of 1/4" aluminum plate with hat section stiffeners to minimize deflection. Each door rides on 26 sealed H.D. 1.6" diameter roller bearings designed to give years of trouble free service. The interior trap door seal protects against moisture intrusion
- - Single Speed Door Opener: The trap operator shaft on single speed openers has been repositioned for ease of operation and clearance for swing augers
- 18 oz. All-Welded Tarp: Heat-welded seams add strength and thickness to high stress areas
- Air Ride Dump Valve and Oil Filled Pressure Gauge: Included with all air-ride suspensions
- Standard ABS System: Timpte is standard with the premium Meritor/Wabco A.B.S. System utilizing four wheel sensors, and two modulating valves
- Standard Flip Step Ladder: A functional ladder extension that stores in the upward position and is swung down to provide unequaled rear access and safety
- Rear Corner Frame Posts: The ability to vent through the corner posts
- Heavy duty extruded aluminum box design top rail eliminates having to use fixed structural tarp bows. Timpte bows are easily replaced if damaged. Two ridge straps are standard





Since 1884

For more information contact your local Timpte Factory Direct Customer Support Center or Authorized Dealer Location

TIMPTE.COM

MADE IN AMERICA

# Retractable Telescoping Tongue

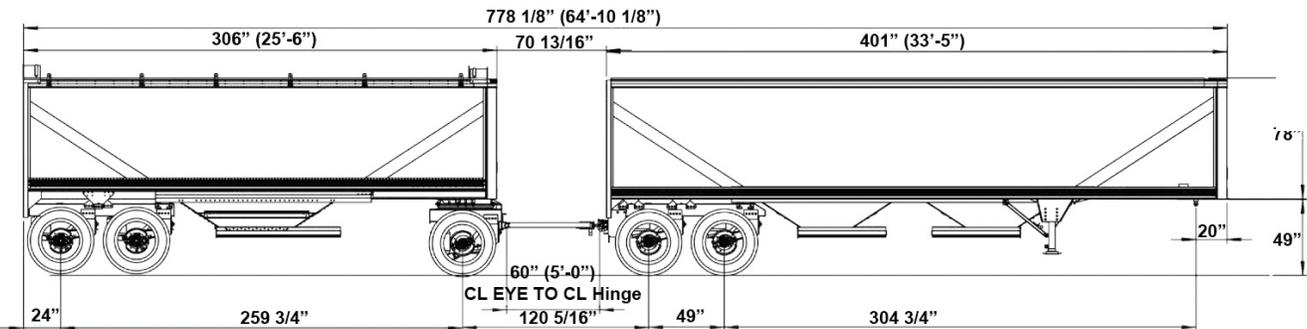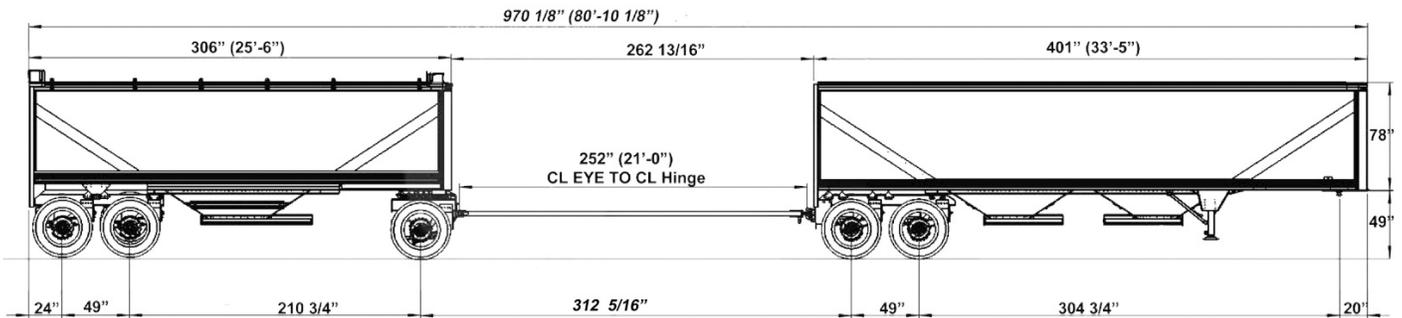

Other Tongue Options Available

## Capacities

LENGTH & HEIGHT	HEAPED 9" 102" Wide / Ag Tub	WATER LEVEL 102" Wide / Ag Tub
33' 5" Length / 78" Height	1595 ft <sup>3</sup>	1439 ft <sup>3</sup>
25' 6" Length / 78" Height	1131 ft <sup>3</sup>	1013 ft <sup>3</sup>



Since 1884

For more information contact your local TimpTE Factory Direct Customer Support Center or Authorized Dealer Location

TIMPTE.COM

MADE IN AMERICA